


3.03 PRIMAFLEX UNI V2

Temperature range -55 °C to 150 °C

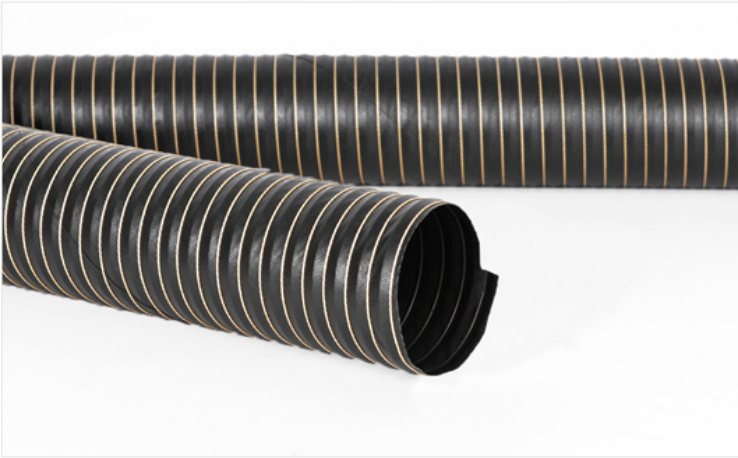

Description

Single-ply, super-flexible, extremely light, vulcanized hose made of neoprene-coated glassfiber fabric. Internal spring steel spiral and external cord made of special yarn. A finely crafted specialist product of high quality using high-grade raw materials. Universally deployable in medium temperature applications for hot and cold air as well as gases and vapors.

Available in our online shop

Properties

- Single-ply
- Superior heat resistance
- Superior cold resistance
- Super flexible, also in cold temperatures
- High compressibility
- Extremely lightweight
- Non-kinking
- Smallest bending radii
- Installation in most narrow areas

Application ranges

Printing machines, Transport of hot and cold air, Plant engineering, Granulate Dryers, Suction technology, Suction hoses, extreme strain, High-temperature suction, Supply air hoses, Hot air

Length

Standard length: 4 m. Other lengths according to specifications.

Further informations

Color: black.

Variants: spiral-free ends (sleeves), expanded sleeves, reduced sleeves.

TECHNICAL SPECIFICATIONS

Inner-Ø (mm)	Outer-Ø (mm)	Bending radius (mm)	Pressure (bar)	Vacuum (bar)	Weight (kg/m)	Length (m)	Article-No.
19	22	10	1,5	0,53	0,08	2,5	1011019
22	24	11	1,5	0,53	0,085	2,5	1011022
25	29	13	1,4	0,53	0,12	4	1011025
32	35	16	1,4	0,5	0,13	4	1011032
38	41,5	19	1,4	0,5	0,165	4	1011038
41	45	21	1,2	0,48	0,18	4	1011041
44	48	22	1,2	0,44	0,19	4	1011044
51	55	26	1,2	0,44	0,25	4	1011051
57	61	29	1,1	0,4	0,28	4	1011057
60	64	30	1,1	0,4	0,29	4	1011060
63	67	32	1,1	0,4	0,3	4	1011063
65	69	33	1,1	0,38	0,34	4	1011065
70	74	35	1,1	0,35	0,395	4	1011070
76	80	38	1	0,35	0,41	4	1011076
80	84	40	1	0,32	0,44	4	1011080
83	87	42	1	0,3	0,47	4	1011083
89	93	45	0,9	0,295	0,495	4	1011089
95	99	48	0,9	0,27	0,54	4	1011095
102	106	51	0,9	0,26	0,57	4	1011102
110	114	55	0,8	0,23	0,69	4	1011110
114	119	57	0,8	0,21	0,73	4	1011114
121	126	61	0,8	0,19	0,76	4	1011121
127	132	64	0,8	0,17	0,805	4	1011127
140	145	70	0,8	0,15	0,885	4	1011140
152	157	76	0,6	0,14	1,05	4	1011152
160	164	80	0,6	0,13	1,06	4	1011160
165	169	83	0,6	0,12	1,08	4	1011165
180	184	90	0,6	0,11	1,22	4	1011180
203	208	102	0,5	0,07	1,38	4	1011203
229	234	115	0,3	0,06	1,557	4	1011229
254	259	127	0,2	0,04	1,727	4	1011254
305	310	152	0,1	0,03	2,073	4	1011305